

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : G01B 11/03	A1	(11) International Publication Number: WO 93/07443 (43) International Publication Date: 15 April 1993 (15.04.93)
<p>(21) International Application Number: PCT/NO92/00167</p> <p>(22) International Filing Date: 9 October 1992 (09.10.92)</p> <p>(30) Priority data: 913994 11 October 1991 (11.10.91) NO</p> <p>(71) Applicant (for all designated States except US): METRON-OR AS [NO/NO]; Fekjan 13, N-1360 Nesbru (NO).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only) : PETTERSEN, Alf [NO/NO]; Emil Stangs vei 27B, N-1346 Gjettem (NO). RØTVOLD, Øyvind [NO/NO]; Lidarende 1, N-1364 Hvalstad (NO).</p> <p>(74) Agent: LANGFELDT, Jens, F., C.; Bryns Patentkontor a/s, P.O. Box 9566, Egertorget, N-0128 Oslo 1 (NO).</p>		<p>(81) Designated States: AT, AU, BB, BG, BR, CA, CH, CS, DE, DK, ES, FI, GB, HU, JP, KP, KR, LK, LU, MG, MN, MW, NL, NO, PL, RO, RU, SD, SE, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, SN, TD, TG).</p> <p>Published With international search report.</p>

(54) Title: METHOD AND SYSTEM FOR POINT BY POINT MEASUREMENT OF SPATIAL COORDINATES

(57) Abstract

Method and system for point by point measurement of spatial coordinates, in which a touch probe (8; 14) comprising three point sized light sources (9, 10, 11, 17, 18) at known local coordinates relative to a local probe fixed coordinate system and with a touch point (12) at known location relative to said local coordinate system, is used such that said touch probe touches the point to be measured. A single opto-electronic angle sensor (13) for measurement of spatial direction towards point sized light sources (9, 10, 11, 17, 18) is set up such that its field of view/work area covers the essential parts of the object to be measured, and such that the light sources of said touch probe are seen from the angle sensor (13) for all the relevant measurement points. The spatial direction for each of the light sources of the touch probe are registered simultaneously. Based on the registered spatial directions, the position and orientation of the touch probe are calculated relative to said single angle sensor, and such that the position of the touch probe is related to its point of contact with the measured object.

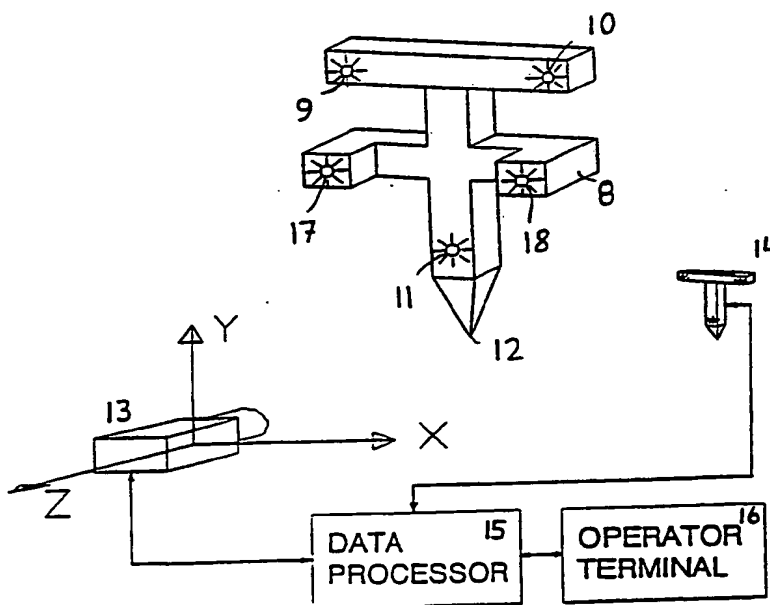

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	LI	Liechtenstein	SK	Slovak Republic
CI	Côte d'Ivoire	LK	Sri Lanka	SN	Senegal
CM	Cameroon	LU	Luxembourg	SU	Soviet Union
CS	Czechoslovakia	MC	Monaco	TD	Chad
CZ	Czech Republic	MG	Madagascar	TG	Togo
DE	Germany	ML	Mali	UA	Ukraine
DK	Denmark	MN	Mongolia	US	United States of America
ES	Spain			VN	Viet Nam
FI	Finland				

METHOD AND SYSTEM FOR POINT BY POINT MEASUREMENT OF SPATIAL COORDINATES

5 The present invention relates to an opto-electronic system for point by point measurement of spatial coordinates. More specifically, the invention relates to a method and system for point by point measurement of spatial coordinates, where a touch probe comprising a minimum of three point sized light sources at known coordinates relative to a local probe fixed coordinate system and with a touch point at a known location
10 relative to said local coordinate system, is brought into contact with the point for which the coordinates are to be determined.

15 Said system is based on the use of opto-electronic angle sensors calibrated for measurement of angles in two dimensions (spatial direction) towards active light sources or diffuse light reflexes, e.g. as described by the inventors in Norwegian Patent No. 165046.

20 The present invention proposes a system solution using one angle sensor in combination with a measurement probe as described by the inventors in Norwegian Patent Application No. 901831, and in Swedish Patent no. 456 454.

25 A system according to the invention described in Norwegian Patent no. 165046 allows registration with high precision of the position, orientation and or surface geometry of objects, either static or dynamic. This is only to a limited extent possible by existing non-contact measurement techniques. The
30 flexibility and transportability of the system makes it applicable for measurement tasks that can not be solved by conventional mechanical coordinate measurement machines. Such machines are large and complex, expensive and less flexible.
35 The system is optimized for high accuracy.

As one angle sensor alone gives the information of the direction towards a point only, conventionally two or more angle sensors are used in combination. The spatial coordinates of a point are calculated by a so called intersection technique. Starting from known coordinates of the angle sensors, as well as the measured spatial directions, the coordinates are calculated for the point where the lines of sight from the individual angle sensors intersect. In the case of using two angle sensors the intersection angle shall be as close to 90 degrees as possible to obtain optimum accuracy in all three dimensions (x, y, z). This introduces high requirements for free sight, since all measurement points have to be seen from at least two different directions. This may be a problem in industrial applications, since the object to be measured is often partly or completely hidden by robots or other production equipment.

The present further development suggests a simplified system based on one angle sensor and a special made touch probe. Spatial coordinates can be determined by the use of only one angle sensor, if the touch probe is equipped with a minimum of three measurement points at known locations relative to the touch point of the probe. The use of a touch probe eliminates sighting problems, both by the fact that the measurement point itself must not be seen by the angle sensor as long as all of the measurement points of the probe are seen, and that the line of sight requirements are reduced to that of one angle sensor only. This leads to a simplified setup of the angle sensor, better access to difficult areas, better transportability, and increased measurement speed.

Normally, a system based on one angle sensor only, will not give the same accuracy in spatial coordinates as systems based on a plurality of angle sensors of corresponding type. Especially this is the case for the direction of depth relative to the angle sensor. However, there are a number of geometry measurement tasks where the flexibility and measurement speed

requirements are higher than the accuracy requirements. Furthermore, there are a number of industrial measurement problems where a high accuracy is required in two dimensions, but less in depth, e.g. the determination of the straightness and roundness of an aircraft fuselage.

Norwegian Patent No. 165046 describes a fully automatic and accurately calibrated angle sensor as shown in fig. 1. That sensor is developed to measure the direction towards points like active light sources or points illuminated by active light sources. This ensures secure measurement point identification, and hence allows automatic operation, as well as ensures a very high signal to noise ratio and hence contributes to high accuracy.

The angle sensor mainly comprises a camera housing 1, a lens unit 2 and a two dimensional array (matrix) 3 of photosensitive elements 5. The lens unit is a camera lens with standard, spherical optics, having a focal distance mainly given by the field of view requirements. Possibly, the lens may have an anti-reflection coating or optical filter, which has to be matched to the spectral distribution of the light sources to be used. The photosensitive elements may e.g. be of CCD (Charge Coupled Device) or CID (Charge Injected Device) type. Due to the accuracy requirements, normally matrices of maximum resolution will be applied. If the system speed is of main importance, matrices having fewer elements will be applied. High accuracy is ensured by the use of accurate procedures to calibrate the angle sensor. This is described in Norwegian Patent No. 165046.

Figure 2 shows the principle for spatial direction measurements. The fully automatic function of the angles sensor is based on the use of active light sources, e.g. light emitting diodes 6. The image of the light emitting point 6 given by the lens system 2 is an illuminated spot 7 on the array of photosensitive elements 3. The image illuminates a number of

elements 5 with an intensity distribution given by the size of the emitting point, and the resolution of the lens system. The position of the illuminated spot is an unambiguous measure of the spatial direction towards the imaged point. The spatial direction is given as two angles α and β . β is the angle between the spatial direction and the horizontal plane of symmetry of the angle sensor, α is the angle between the optical axis and the direction towards the projection of the light emitting point into the horizontal plane of symmetry. Both angles α and β have values 0 at the optical axis.

In the present invention, it is suggested to use one angle sensor in combination with a touch probe equipped with a minimum of three light sources in known coordinates relative to a local, probe fixed coordinate system. In addition, the touch probe has a touch point (reference point) which as an example can have a shape of a needle tip. By knowing the location of this point relative to the local coordinate system, the position of the touch probe can be related to this point.

Essentially, the touch probe will function as described in Swedish Patent No. 456 454, and may have exchangeable tools as described in Norwegian Patent Application No. 901831. Figure 3 illustrates a probe for determination of the coordinates of a point. The probe comprises a body 8, three light sources 9 - 11, and a touch point 12 shaped as a needle tip.

According to the present invention, the method is characterized in that a single opto-electronic angle sensor designed to measure the spatial direction to point sized light sources, is located such that its field of view / working area basically covers the object to be measured, and such that the light sources of said touch probe will be visible to the angle sensor for all measurement points in question, that spatial direction for each of the light sources of said touch probe are registered simultaneously, and that the position and orientation of the touch probe relative to said single angle sensor are

computed from the registered spatial directions, and such that the position of the touch probe is related to its touch point with the measured object.

5 Further the system of the invention is characterized in a single opto-electronic angle sensor designed to measure the spatial direction to point sized light sources, and means for computation of the position and orientation of the touch probe relative to said single angle sensor based on the knowledge of
10 the position of said light sources relative to the touch point of the probe and the measured directions from the angle sensor to the individual light sources, and such that the position of the probe is related to said touch point.

15 According to further features of the system, according to the invention, the system touch probe is connected to the data processor of said system such that illumination time and intensity for each individual probe light source can be controlled from the signal level that is at any time registered
20 by the angle sensor.

Also, said light sources exhibit a well defined and known spectral distribution, and that the angle sensor has an optical filter that matches this distribution.

25 Further features of the method are suggested, wherein the coordinates of a set of object points are measured repeatedly, using different locations of the angle sensor relative to the object, and all measured coordinates are combined by a least
30 squares analysis or bundle adjustment calculation to improve the overall coordinate accuracy.

Further features of the invention are given in the following description of examples being non-limitative to the invention,
35 with references to the accompanying drawings.

Figure 4 illustrates a system based on one angle sensor and a touch probe.

Figure 5 illustrates a touch probe having 5 light sources.

5 Figure 4 illustrates a complete system for point by point coordinate measurement. The system comprises an angle sensor 13, e.g. of the same type as described in Norwegian Patent No. 165046, a touch probe 14, a data processor 15, and an operator
10 terminal 16. A coordinate measurement is made by bringing the touch probe into contact with the object to be measured, such that its touch point 12 touches the object in the point of interest. The spatial direction towards each of the individual light points of the probe are registered by the angle sensor
15 13. All light emitting points are registered simultaneously, such that for each registration there will be a number of intensity maximas registered by the sensor's array of photosensitive elements, corresponding to the number of light sources in the touch probe.

20 The system's data processor 15 is responsible for the acquisition of measurement data from the angle sensor, and the analysis of the data. The data analysis mainly includes:

- 25 - measurement timing and exposure time control to optimize the signal to noise ratio,
- identification of the individual light sources, i.e. determination of which spot in the image that corresponds
30 to which light source,
- calculation of the spatial direction for each individual light source, based on the image information,
- 35 - calculation of spatial coordinates for the touch probe.

The calculation of the spatial coordinates of the touch probe is based on the known location of the individual light sources relative to a probe fixed, local coordinate system. The calculation principle may be based on conventional resection technique, or photogrammetric calculation methods. By the use of photogrammetry technique, the projection of the light points into the array of photosensitive elements of the angle sensor is evaluated. The projection can be described by a rotation and translation matrix giving the position and orientation of the touch probe relative to the angle sensor. The computation is based on minimizing errors (least squares analysis) by utilizing redundant information. The necessary mathematical basics can be found in H.M. Kamara (Ed.): Non-topographic photogrammetry. Second Edition, 1987, page 37-55.

To do the computation it is essential to identify the individual light sources, i.e. which of the registered light spots in the image corresponds to which of the light sources. This is necessary for two reasons: to relate the measured directions for each light point to the correct local coordinates for that point relative to the probe fixed coordinate system, and if it is needed to adjust the light intensity or exposure time of one of the light sources, to know which one. The touch probe will be held manually by an operator. Hence it is important that all light sources are imaged simultaneously to avoid errors due to probe motions. This means that the identification can not be made by turning the light sources on in a sequence. The identification procedure depends on the shape of the touch probe. Furthermore, it should be possible to identify the light points even if one or more points are missing in the image, e.g. if parts of the probe is occluded by objects within the field of view.

To achieve optimum accuracy, it is important to have as high signal to noise ratio as possible. A method to achieve this is to connect the individual light sources of the touch probe to the data processor such that the exposure time and / or current

levels can be adjusted to optimum conditions based on the measured intensity values for each light source. This method makes the system very flexible with respect to the allowed distance between the angle sensor and the touch probe.

5 The general ambient light or other light sources in the measurement field may give the measurements a significant noise contribution. To reduce this contribution, light sources of a well defined spectral distribution can be used, and additional-
10 ly the angle sensor can be equipped with an optical filter that removes all light outside this spectral range.

Using the procedure as described, the calculated coordinates will be given relative to a coordinate system defined by the
15 position and orientation of the angle sensor. The measurements can be related to any coordinate system, as long as there is a minimum of three points having well defined coordinates in that coordinate system. Measuring the global coordinates of these points, gives the necessary data to transform all
20 measured coordinate values to the local coordinate system.

Improved 3D coordinate measurement accuracy can be obtained by combining measurements of the same points made from different angle sensor locations around the object. The measurement data
25 can be analyzed using a least squares analysis or bundle adjustment, based on the same mathematical concepts as used for theodolite measurement data analysis. By this method, the poor accuracy in the depth direction relative to the angle sensor is substituted by high accuracy measurements from other sensor
30 locations.

If the system described in the present patent application is used in combination with a system based on two angle sensors as described in Norwegian Patent No. 165046, it will be an
35 advantage first to position a number of auxiliary reference points and to measure their accurate position relative to a relevant coordinate system by the use of multiple angle sensor

locations. Then, by using one or two angle sensors to measure only a small part of the overall object, these auxiliary reference points can be used to relate all measurements to the correct coordinate system.

5 An operator terminal 16 consisting of monitor and keyboard is connected to the data processor for the operator to communicate with the system. This unit can as an example be used for continuous and final presentation of measurement results.

10 The use of only one angle sensor to determine spatial coordinates strongly restricts the shape of the touch probe. The accuracy of the calculated coordinates depends on the shape and size of the measurement probe relative to the distance to the angle sensor and the field of view of the sensor. The minimum
15 number of light sources is three, but this may give ambiguous results and poor accuracy. In figure 5 a touch probe having 5 light sources is proposed, three of these defines a plane, the last two is separated from this plane. Such a shape gives
20 significantly improved accuracy, as well as relatively simple and secure identification of each light source.

Angle sensors as described in Norwegian Patent No. 165046 are assumed above. These can be replaced by other types of angle
25 sensors, e.g. automatic theodolites. Normally, theodolites can not register multiple light sources simultaneously, making the data acquisition time consuming.

In the present context the term angle sensors shall include
30 electro-optical sensors based on photogrammetric technique. In photogrammetry a point is considered to be imaged through the projection center of a lens system, and the direction is given as the image coordinates of the image of the point in the image plane. The inner orientation of the camera, i.e. the parameters
35 describing the relation between spatial direction and the image point have to be known.

The measurement system as described above solves a number of measurement problems where at present no practically applicable methods exist:

- 5 - alignment and adjustment of industrial production cells,
 where theodolites can not be used due to insufficient
 sight;
- 10 - crash tests in the automotive industry: how is the car
 interior deformed? Theodolite systems and conventional
 photogrammetry can only be used for determination of the
 exterior deformation of the car body;
- 15 - surveying of the interior geometry of aircraft and
 helicopter fuselages;
- 20 - determination of the dynamic behavior of an object, by
 attaching the touch probe to the object to have a fixed
 relation between the internal probe fixed coordinate
 system of the probe and a local, object fixed coordinate
 system.

Due to the automatic operation, the flexibility and the simple
setup of the measurement system, it is quite competitive
25 relative to conventional use of theodolites for a number of
applications:

- 30 - surveying of the exterior geometry of aircrafts, helicop-
 ters, cars etc. where the accuracy requirements are not
 as high in all spatial dimensions, e.g. straightness and
 roundness of an aircraft fuselage;
- 35 - measurement of deformation (downward flexing) of e.g. an
 aircraft wing;
- high precision, large volume measurements using multiple
 angle sensor locations; this can be applied to check the

coordinates of a number of well defined control points, or to establish a set of accurate reference points to be used when measurements are made within smaller parts of a large object.

5

10

15

20

25

30

35

P a t e n t c l a i m s .

1.

5 A method for point by point measurement of spatial coordinates, where a touch probe 14 comprising a minimum of three point sized light sources 9, 10, 11, 17, 18 at known coordinates relative to a local probe fixed coordinate system and with a touch point 12 at a known location relative to said local coordinate system, is brought into contact with the point for
10 which the coordinates are to be determined, characterized in:

- that a single opto-electronic angle sensor 13 designed to measure the spatial direction to point sized light sources, is located such that its field of view / working
15 area basically covers the object to be measured, and such that the light sources 9, 10, 11, 17, 18 of said touch probe 14 will be visible to the angle sensor 13 for all measurement points in question,
- 20 - that spatial direction for each of the light sources 9, 10, 11, 17, 18 of said touch probe are registered simultaneously, and
- 25 - that the position and orientation of the touch probe 14 relative to said single angle sensor 13 are computed from the registered spatial directions, and such that the position of the touch probe 14 is related to its touch point 12 with the measured object.

30

2.

System for point by point measurement of spatial coordinates, comprising a touch probe 14 having a minimum of three point sized light sources 9, 10, 11, 17, 18 at known local coordinates relative to a local probe fixed coordinate system, and
35 with a touch point 12 at a known location relative to said local coordinate system, further comprising:

- a single opto-electronic angle sensor 13 designed to measure the spatial direction to point sized light sources, and
- 5 - means 15 for computation of the position and orientation of the touch probe 14 relative to said single angle sensor 13 based on the knowledge of the position of said light sources 9, 10, 11, 17, 18 relative to the touch point 12 of the probe 14 and the measured directions from the angle sensor 13 to the individual light sources 9,
10 10, 11, 17, 18, and such that the position of the probe 14 is related to said touch point 12.
- 3.
15 System for point by point measurement of spatial coordinates as stated in claim 2, characterized in:
 - that the system touch probe 14 is connected to the data processor 15 of said system such that illumination time and intensity for each individual probe light source 9,
20 10, 11, 17, 18 can be controlled from the signal level that is at any time registered by the angle sensor 13.
- 4.
25 System for point by point measurement of spatial coordinates as stated in claim 2, characterized in:
 - that said light sources 9, 10, 11, 17, 18 exhibit a well defined and known spectral distribution, and that the
30 angle sensor 13 has an optical filter that matches this distribution.
- 5.
Method for point by point measurement of spatial coordinates
35 as stated in claim 1, wherein:

14

- the coordinates of a set of object points are measured repeatedly, using different locations of the angle sensor 13 relative to the object,
- 5 - all measured coordinates are combined by a least squares analysis or bundle adjustment calculation to improve the overall coordinate accuracy.

10

15

20

25

30

35

1/3

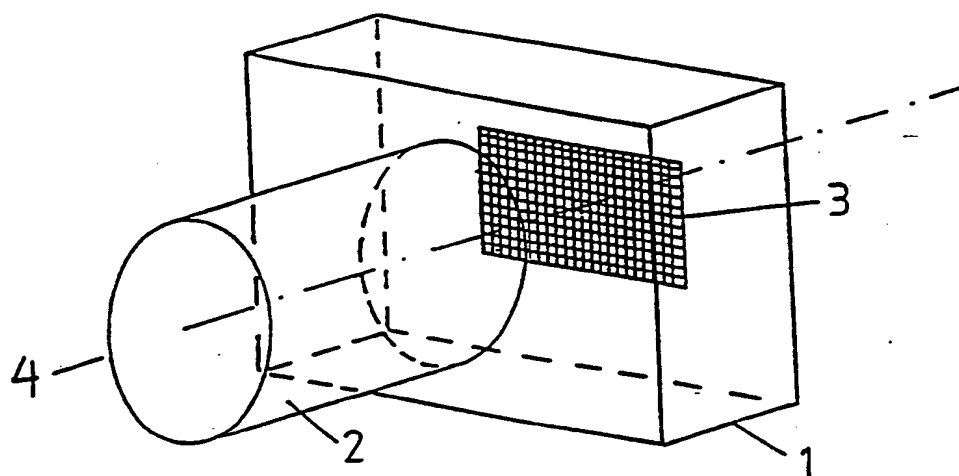


Fig. 1 (Prior art)

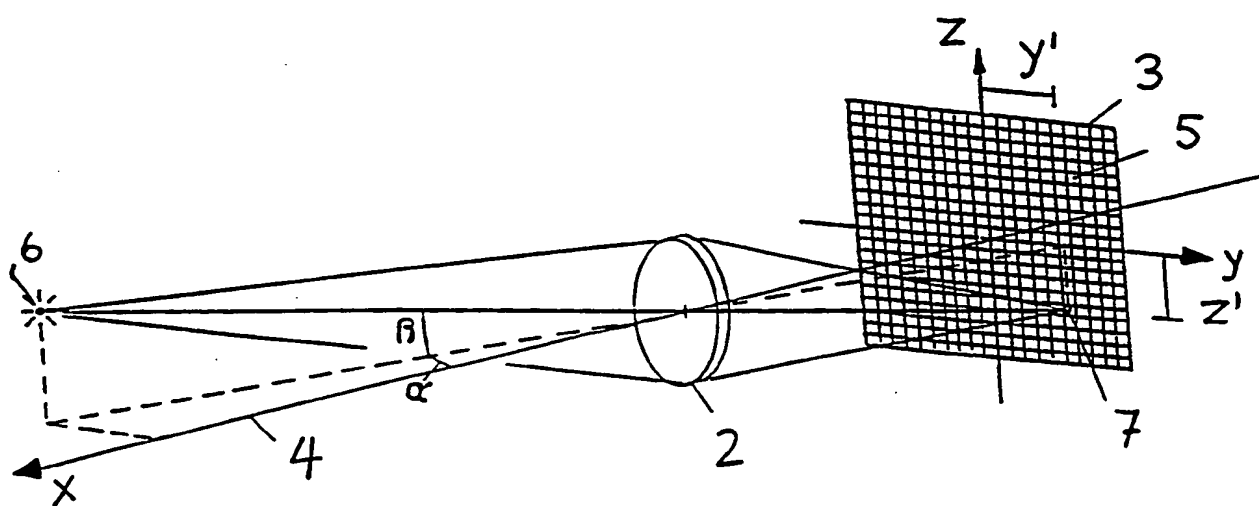


Fig. 2 (Prior art)

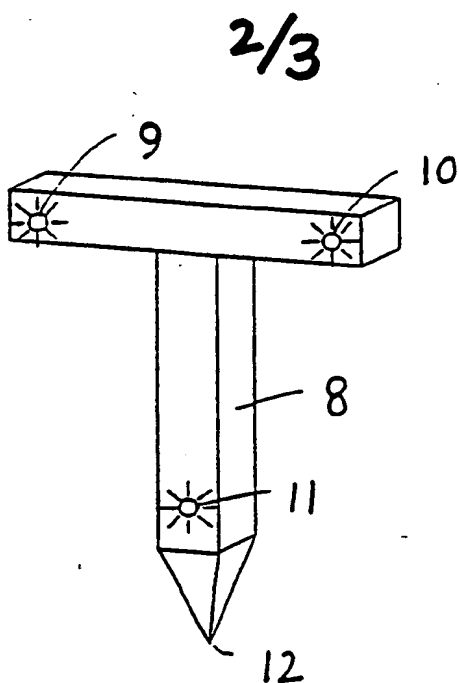


Fig. 3 (Prior art)

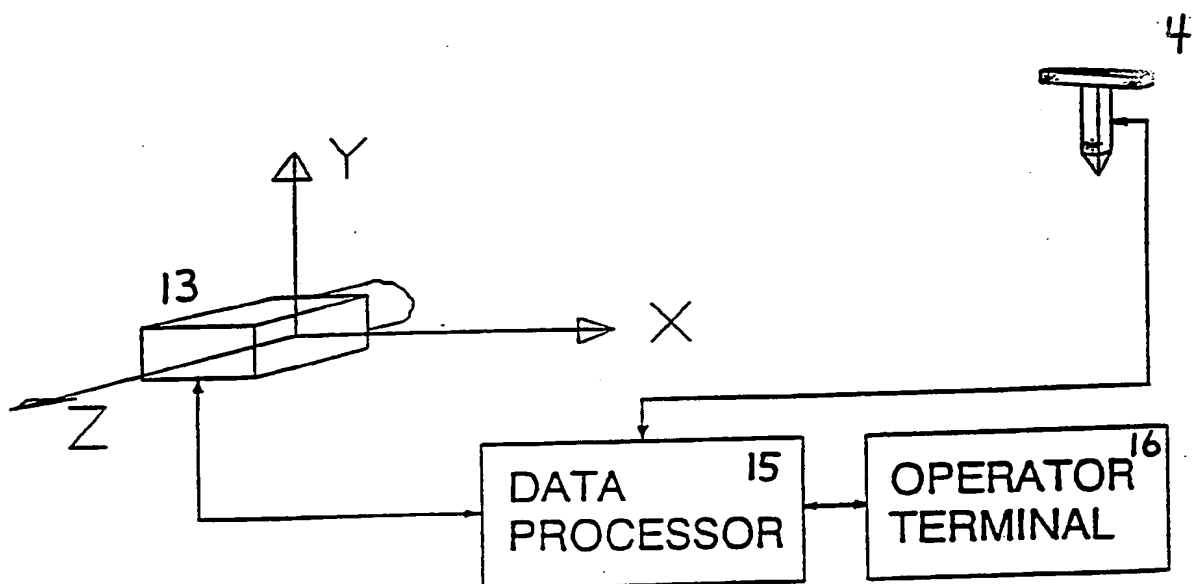


Fig. 4

3/3

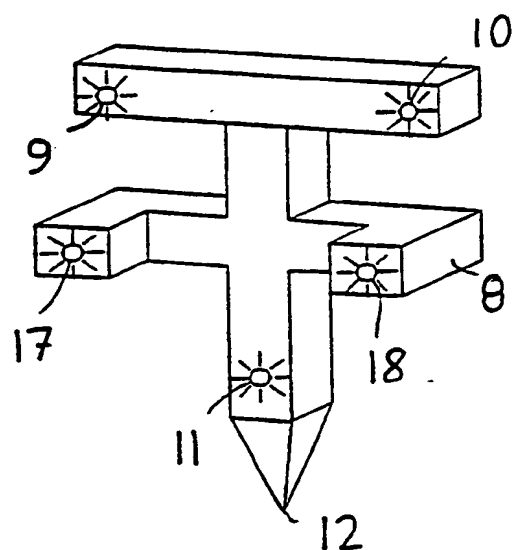


Fig. 5

INTERNATIONAL SEARCH REPORT

International Application No PCT/NO 92/00167

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶ According to International Patent Classification (IPC) or to both National Classification and IPC IPC5: G 01 B 11/03		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
IPC5	G 01 B	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in Fields Searched ⁸		
SE,DK,FI,NO classes as above		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
A	WO, A, 8909922 (METRONOR A.S.) 19 October 1989, see the whole document --	1,2
A	SE, B, 456454 (LARS DAVID HUGO LINDQVIST) 3 October 1988, cited in the application --	1,2
P	WO, A, 9116598 (METRONOR A/S) 31 October 1991, see the whole document -- -----	1,2
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>* Special categories of cited documents: ¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
14th January 1993	15 -01- 1993	
International Searching Authority	Signature of Authorized Officer	
SWEDISH PATENT OFFICE	INGEMAR JOSEFSSON	

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO. PCT/NO 92/00167

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the Swedish Patent Office EDP file on 02/12/92. The Swedish Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A- 8909922	89-10-19	AU-D- 3418489	89-11-03
		EP-A- 0409875	91-01-30
		JP-T- 3503680	91-08-15
SE-B- 456454	88-10-03	SE-A- 8700638	88-08-18
WO-A- 9116598	91-10-31	AU-D- 7770891	91-11-11

